


Khuôn hàn hóa nhiệt Goldweld CR25

Rod Size		Conductor Size	Metal Powder (g)	Graphite Mould Type	Handle Clamp Type
A _{mm}	A _{inch}	B _{mm²}			
14.2;16	5/8	10	65	CR25-E-1610	HCC
		16	90	CR25-E-1616	HCC
		25	90	CR25-E-1625	HCC
		35	115	CR25-E-1635	HCC
		50	150	CR25-E-1650	HCC
		70	150	CR25-E-1670	HCC
		95	150	CR25-E-1695	HCC
		120	200	CR25-E-16120	HCC
		150	200	CR25-E-16150	HCC
		185	250	CR25-D-16185	HCD
		240	150x2	CR25-D-16240	HCD
172;18		10	90	CR25-E-1810	HCC
		16	90	CR25-E-1816	HCC
		25	115	CR25-E-1825	HCC
		35	115	CR25-E-1835	HCC
		50	150	CR25-E-1850	HCC
		70	150	CR25-E-1870	HCC
		95	200	CR25-E-1895	HCC
		120	250	CR25-E-18120	HCC
		150	250	CR25-E-18150	HCC
	3/4	185	150x2	CR25-D-18185	HCD
		240	150x2	CR25-D-18240	HCD
		300	200x2	CR25-D-18300	HCD

Khuôn hàn hóa nhiệt Goldweld CR25 dùng để hàn 3 ngã cáp nằm ngang và 1 đầu cọc thẳng đứng

CR25

Cable to Ground Rod
Horizontal cable tap and run
to ground rod

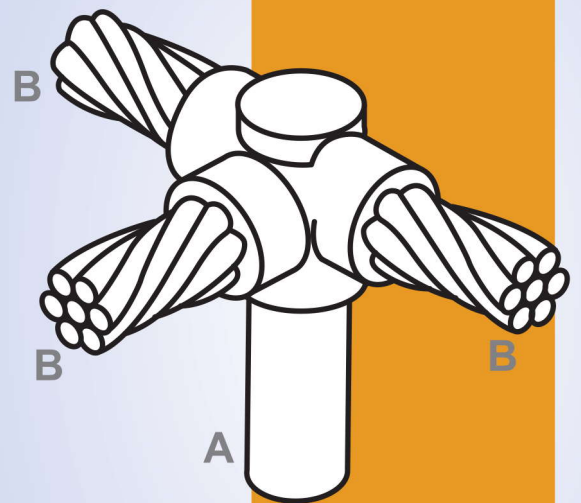

Tools Request :




Mould



Mould brush



Handle clamp



Metal powder



Steel disk



Flint igniter



Bus bar brush